



Floor Heating Mats - FHM

for comfort heating

Thermo Floor Heating Mats are suited to generate heat under tile or laminate floors in bathrooms, kitchens and the entire house. Owing to their thin construction and ease of installation they are ideally suited for renovation of homes. FHM are easy to install products without requiring technicians to plan their layouts.

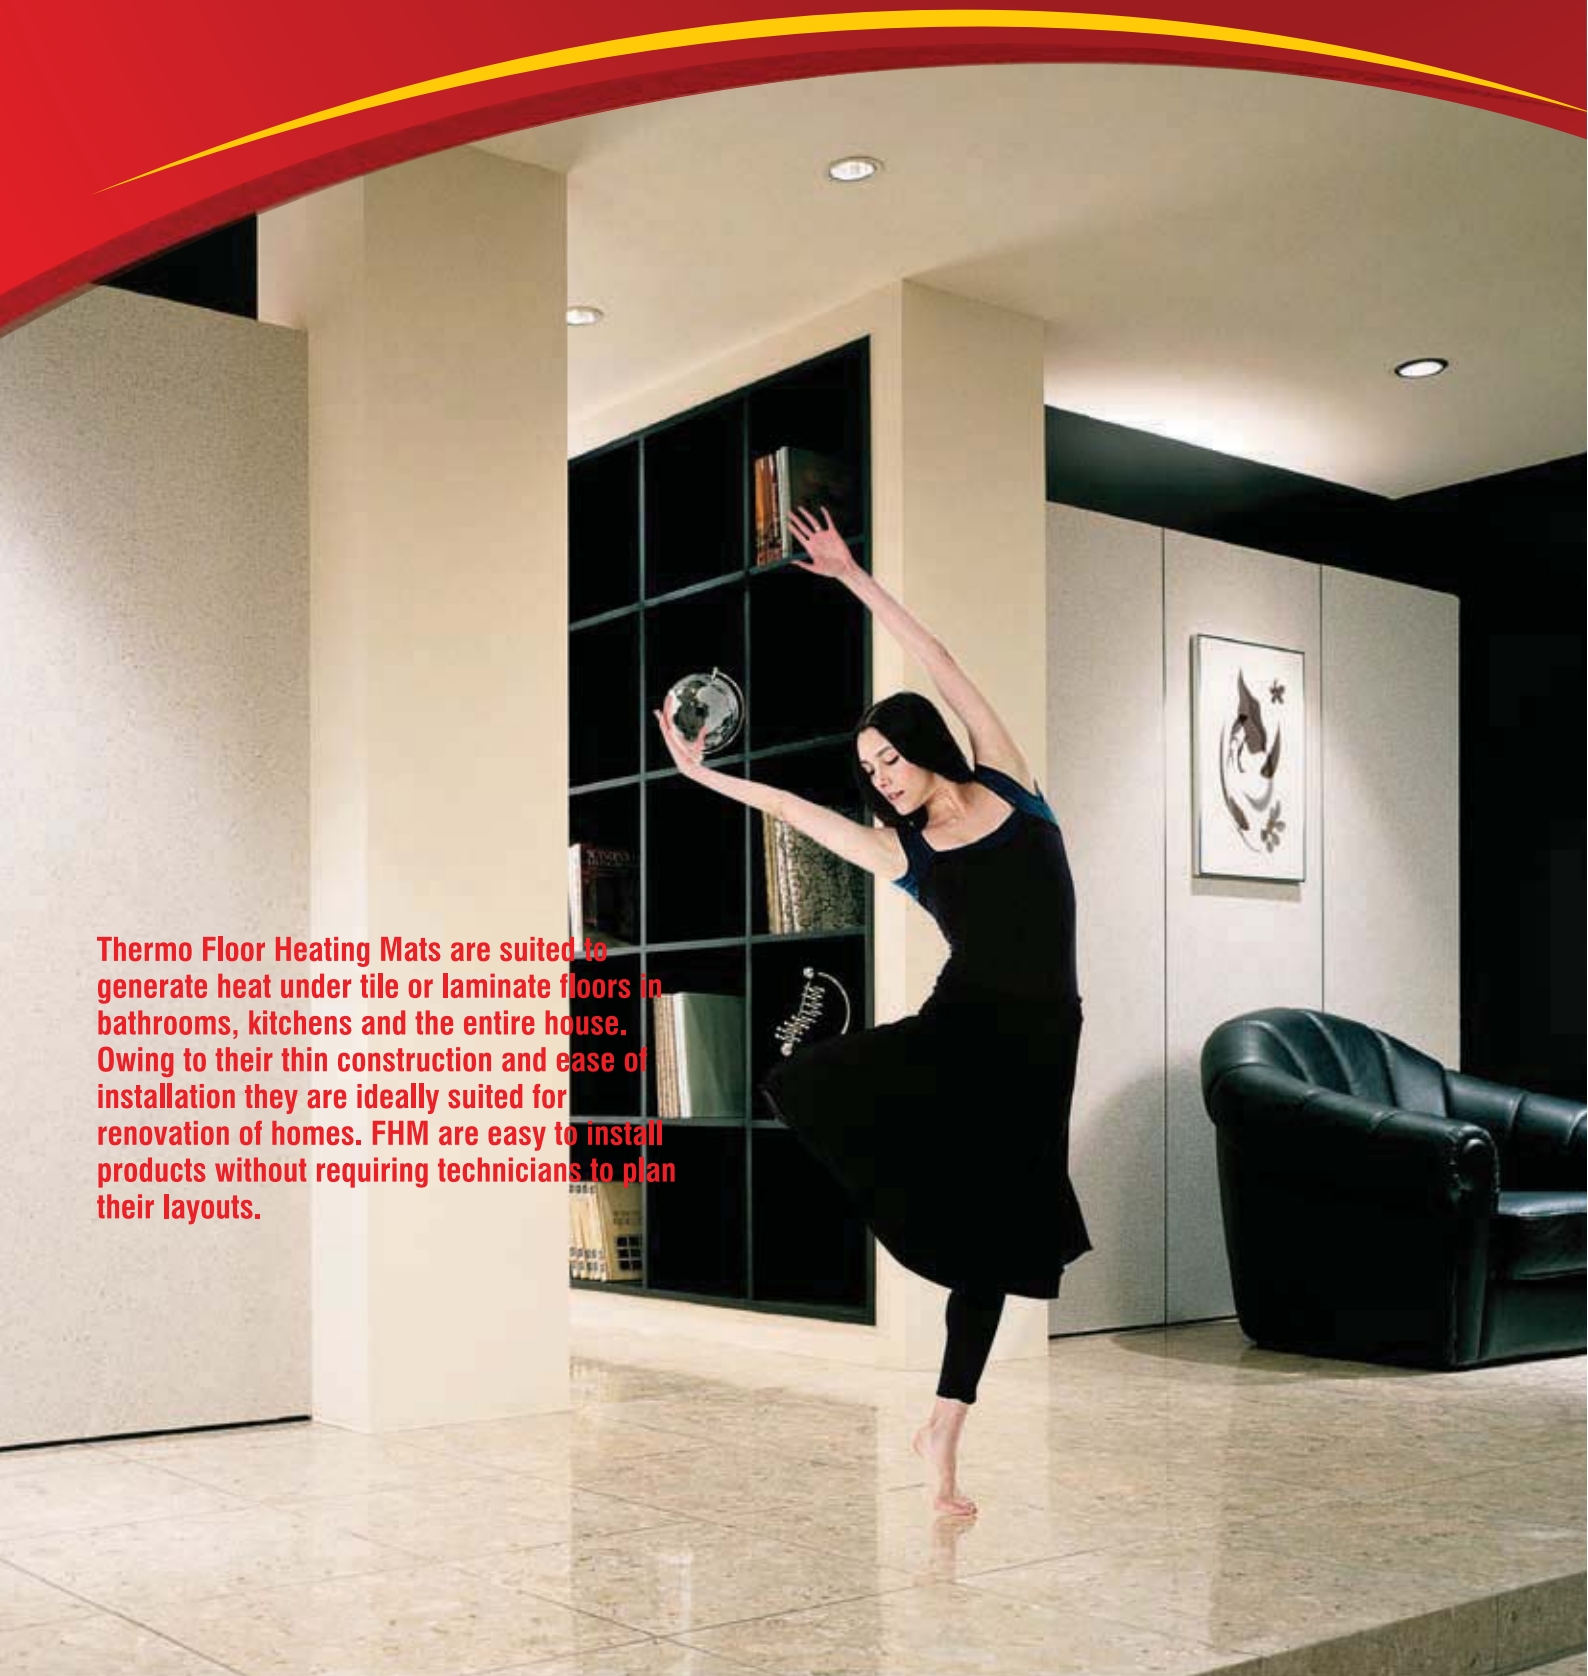

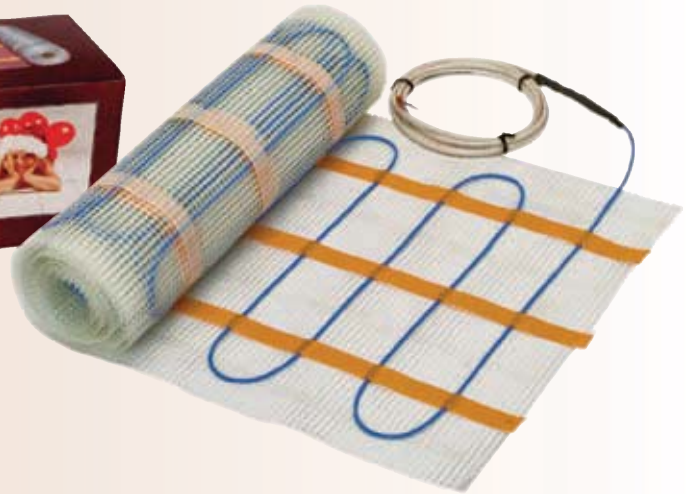

Construction

Floor Heating Mats comprise of flexible, robust fiber-glass mats that carry thin heating elements uniformly fixed on it. These elements are provided with primary fluoropolymer insulation, metal shielding and sheathing of PVC or fluoropolymer.

Heating Element & OD : Single Conductor (2.3mm) and Twin Conductor (3.2 mm)

Standard Wattage : Available in 100, 150 & 200 W/ sq.m

Cold Lead : 3.0 mtr

Features

Approvals

Certified by Intertek SEMKO as per IEC / EN 60335 Standard.

Comfort

Close and uniform spacing of heating cables, associated with thermostat controls to select temperature requirements, provides higher comfort levels.

Safety

Thermostats backed by optional over current protection and GFCI, ensures total protection and safety.

Range

Standard range of heat loads available in 100 W/m², 150 W/m² & 200 W/m². Also various sizes for different kinds / sizes of flooring available as per given product range.

Product Range

Catalog Reference No.	Watts (W)
FHMX-150W/150	150
FHMX-150W/225	225
FHMX-150W/300	300
FHMX-150W/375	375
FHMX-150W/450	450
FHMX-150W/525	525
FHMX-150W/600	600
FHMX-150W/675	675
FHMX-150W/750	750
FHMX-150W/900	900
FHMX-150W/1050	1050
FHMX-150W/1200	1200
FHMX-150W/1350	1350
FHMX-150W/1500	1500
FHMX-150W/1650	1650
FHMX-150W/1800	1800

Note : X = T for twin conductor heating cables