


BISTAR

TP6H60M **120 half-cell**

320 – 340W
half-cut mono perc

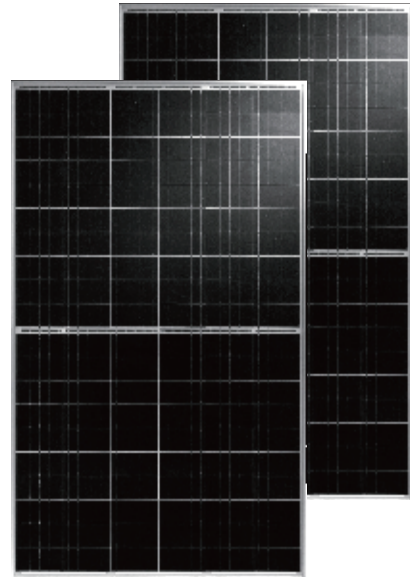

KEY FEATURES



Half-cut cell technology

New circuit design, lower internal current, lower Rs loss



Significantly lower the risk of hot spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



IP68 junction box

The highest waterproof level

SYSTEM & PRODUCT CERTIFICATES


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001 : 2015 Quality Management System
- ISO 14001 : 2015 Environment Management System
- ISO 45001 : 2018 Occupational Health and Safety Management Systems



PERFORMANCE WARRANTY



■ Talesun standard
■ Industry standard

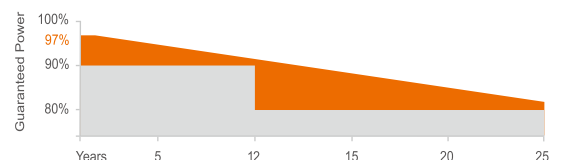

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 - +3%)

Maximum Power(Pmax/W)	320	325	330	335	340
Operating Voltage(Vmpp/V)	33.5	33.8	34.2	34.6	35.0
Operating Current(Imp/A)	9.56	9.62	9.66	9.69	9.72
Open-Circuit Voltage(Voc/V)	40.1	40.3	40.5	40.7	40.9
Short-Circuit Current(Isc/A)	10.16	10.22	10.26	10.29	10.32
Module Efficiency $\eta_m(\%)$	19	19.3	19.6	19.9	20.1

Performance at NMOT

Maximum Power(Pmax/W)	238.3	241.8	245.6	248.8	252.1
Operating Voltage(Vmpp/V)	30.9	31.2	31.5	31.8	32.1
Operating Current(Imp/A)	7.71	7.76	7.80	7.83	7.86
Open-Circuit Voltage(Voc/V)	37.3	37.5	37.7	37.8	38.0
Short-Circuit Current(Isc/A)	8.20	8.25	8.28	8.31	8.33

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

MECHANICAL SPECIFICATION

Cell Type	Mono-Crystalline Silicon (5Busbar)
Cell Dimensions	158.75*158.75mm(6inches)
Cell Arrangement	120(6*20)
Weight	20.7kg(45.64 lbs)
Module Dimensions	1684*1002*35mm (66.30*39.45*1.38inches)
Cable Length	300mm(11.81inches)
Cable Cross Section Size	4mm ² (0.006inches ²)
Front Glass	3.2mm High Transmission, Tempered Glass
No.of Bypass Diodes	3/6
Packing Configuration (1)	30pcs/carton , 780pcs/40hq
Packing Configuration (2)	30+4pcs/carton , 832pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68


OPERATING CONDITIONS

Maximum System Voltage	1000V/DC(IEC)/1500V/DC(IEC)
Operating Temp	-40°C~+85°C
Maximum Series Fuse	20A
Static Loading	5400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	MC4 Compatible

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.39%/°C
Temperature Coefficient Voc	-0.30%/°C
Temperature Coefficient Isc	+0.05%/°C
NMOT	43±2°C

I-V CURVE

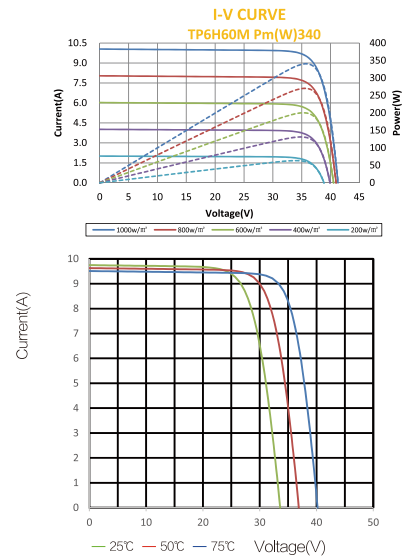

TECHNICAL DRAWINGS

